Overview

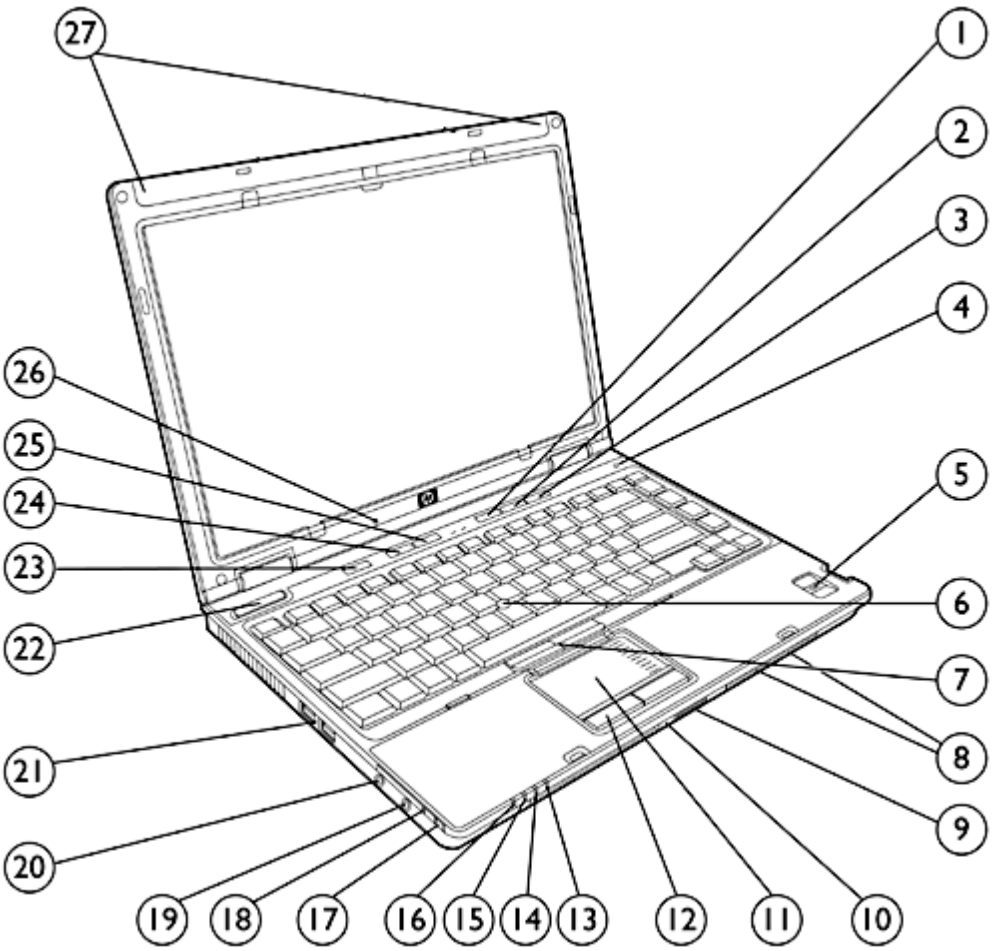

1. Volume Mute Button with LED
2. Volume Down Button
3. Volume Up Button
4. Integrated Microphone
5. Biometric Fingerprint Sensor
6. Pointstick
7. Pointstick Buttons
8. Stereo Speakers
9. SD Media Slot
10. Fast Infrared Port
11. Touchpad with scroll zone
12. Touchpad Buttons
13. Hard Drive Activity LED
14. Battery Charging LED
15. Power/Standby LED
16. Wireless On/Off LED
17. PC Card Eject Button
18. PC Card Slot
19. Headphone Jack
20. Microphone Jack
21. 2 USB 2.0 Ports
22. Power Button with LED
23. HP Info Centre Button
24. Wireless On/Off Button with LED
25. Presentation Mode Button
26. Ambient Light Sensor
27. Dual-band Wireless LAN Antennas

Overview

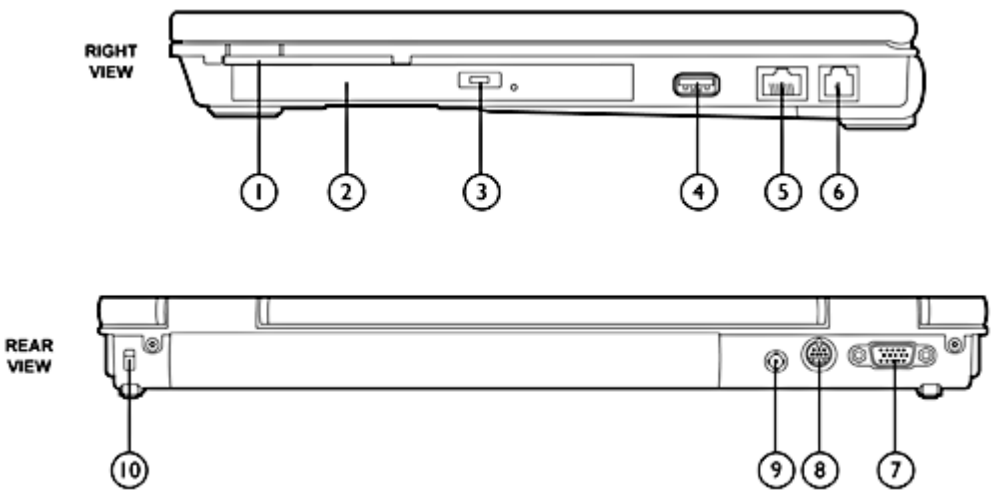

1. Integrated Smart Card Reader
2. MultiBay II Drive with Easy Release
3. Optical Drive Button
4. USB 2.0 Port
5. RJ-45 Port (NIC)
6. RJ-11 Port (Modem)
7. VGA/External Monitor Port
8. S-Video TV Out
9. Power Connector
10. Kensington Lock Slot

At A Glance

- Genuine Windows XP Professional,
  Genuine Windows XP Home Edition, or
  FreeDOS
- Sleek light-weight design starting at under 4.6 lb (2.1 kg) and 1.1 inch (29.2 mm) thin at front
- 14.1-inch wide screen display
- Intel® Core™ Duo Processors T2400 to T2600
- Mobile Intel 945GM Express Chipset or Mobil Intel 945PM Express Chipset
- Up to 4GB* of 533- or 667-MHz DDR2 SDRAM, dual channel memory support
- ATI Mobility Radeon X1300 or Intel Graphics Media Accelerator 950
- Up to 100-GB 7200 rpm, user-removable hard drive
- Optional integrated 802.11 a/b/g or 802.11 b/g wireless LAN module and Bluetooth®
- Support for optional Intel Centrino™ Duo mobile technology
- Protected by three-year standard parts and labour warranty – certain restrictions and exclusions apply

* Above 3-GB, all memory may not be available due to system resource requirements.

Standard Features

Processors

Intel Core 2 Duo Processor T7600 (2.33-GHz, 667-FSB, 4-MB L2 cache)*
Intel Core 2 Duo Processor T7400 (2.16-GHz, 667-FSB, 4-MB L2 cache)*
Intel Core 2 Duo Processor T7200 (2.0-GHz, 667-FSB, 4-MB L2 cache)*
Intel Core 2 Duo Processor T5600 (1.83-GHz, 667-FSB, 2-MB L2 cache)*
Intel Core 2 Duo Processor T5500 (1.66-GHz, 667-FSB, 2-MB L2 cache)*
Intel Core Duo Processor T2600* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo Processor T2500* (2.00-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo Processor T2400* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo processor T2300E* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)

* Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds n battery optimization mode.

Operating System

Preinstalled	Genuine Windows XP Professional SP2 Genuine Windows XP Home Edition SP2 FreeDOS
Supported	Genuine Windows 2000 (drivers downloadable from http://www.hp.com)
Certified	SUSE Linux Enterprise Desktop 10 for x86 Novell Linux Desktop 9 SP3 for x86
Windows Vista Capable	Not all Windows Vista features are available for use on all Windows Vista Capable PCs. All Windows Vista Capable PCs will run the core experiences of Windows Vista, such as innovations in organizing and finding information, security, and reliability. Some features available in premium editions of Windows Vista -- like the new Windows Aero™ user interface -- require advanced or additional hardware. Check http://www.windowsvista.com/getready for details.

Chipset

Mobile Intel 945PM Express Chipset with 667-MHz front side bus (models with discrete graphics)
or
Mobile Intel 945GM Express Chipset with 667-MHz front side bus (models with integrated graphics)

Graphics

For discrete graphics models with 512MB of system memory:
ATI Mobility Radeon X1300 256MB HyperMemory*
Microsoft DirectX 9 capable

For discrete graphics models with 1024MB or more of system memory:
ATI Mobility Radeon X1300 512MB HyperMemory*
Microsoft DirectX 9 capable

For integrated graphics models:
Intel Graphics Media Accelerator 950 with up to 224MB shared system memory, depending on model
Microsoft DirectX 9 capable

* Indicates dedicated video memory and shared system memory. Either 64MB or 128MB dedicated video memory, depending on model.

Standard Features

Display	Internal	14.1-inch WXGA (1280 x 800 resolution and 16 M colors) 14.1-inch WXGA+ (1440 x 900 resolution and 16 M colors) Ambient Light Sensor
	External	Up to 32-bit per pixel colour depth VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz DVI port in optional HP Docking Station (sold separately) supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking NOTE: Resolutions are dependent upon monitor capability, and resolution and colour depth settings.

Memory	Standard	512-MB, 1024-MB or 2048-MB 533-MHz or 667-MHz DDR2 SDRAM; two SODIMM slots supporting dual channel memory
	Maximum	Upgradeable to 4096-MB maximum (2048-MB SODIMM in slots 1 and 2)
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Above 3-GB, all memory may not be available due to system resource requirements.

Communications

Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)*

56K V.92 modem** with digital line guard

* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Wireless Devices

Support for a broad range of secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth is also an option (factory configurable only) and can be combined with any of the supported wireless LAN options.

All integrated wireless LAN options	Wi-Fi certified Cisco Compatible Extensions support (Version 3.0) Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support WiFi certified for WPA2, WMM Dual antennas integrated in the display enclosure
Intel PRO/Wireless 3945ABG Network Connection	Intel Centrino mobile technology Integrated support for 802.11a, b and g Up to 54-mbps data rate
Broadcom 4311AG WiFi Adapter	Integrated support for 802.11a, b and g Up to 54-mbps data rate

Standard Features

	Broadcom 4311BG WiFi Adapter	Integrated support for 802.11 b and g Up to 54-mbps data rate
	HP Integrated Module with Bluetooth 2.0 Wireless Technology	Bluetooth Specification v2.0 compliant Works with a wide range of Bluetooth devices
Keyboard	The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (centre-to-centre spacing), 2.5-mm stroke, comfort-dished keycaps, and bright key legends for improved visibility in low light conditions.	
One-Touch Productivity Buttons	Provide one-touch access to the following features: HP Info Centre, Wireless On/Off, Presentation Mode, Volume Up, Volume Down, and Volume Mute	
Pointing Device	Dual pointing devices: Touchpad with scroll zone, two soft-touch buttons and Pointstick, two soft-touch buttons	
Expansion Card Slots	One Type I/II PC Card slot	Supports 32-bit CardBus and 16-bit PC Cards
	Integrated Smart Card Reader	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
Media Slots	Secure Digital slot	Supports SD (Secure Digital), MMC (MultiMedia Card)
Storage	Hard Drives	60-, 80-, 100-GB 7200 rpm SMART SATA 60-, 80-, 100-GB 5400 rpm SMART SATA
	NOTE: These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 8 GB is reserved for the system recovery software.	
	HP Mobile Data Protection System 3D	Hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration.
	Optical Drives	MultiBay II (9.5-mm) — DVD-ROM MultiBay II Drive DVD/CD-RW Combo MultiBay II Drive DVD+/-RW SuperMulti MultiBay II Drive with Double Layer

Standard Features

Interfaces	PC Card Slot	One Type I/II
	Smart Card Reader	One
	External Monitor	One – VGA
	External Microphone	One
	Headphone/Line out	One
	Power Connector	One
	RJ-11 (Modem)	One
	RJ-45 (NIC)	One
	Fast Infrared Port	One (4-Mb/s support) IrDA 4-MB compliant; IR performance will vary depending on performance of IR peripherals and application used.
	S-Video TV Out	One (Support for NTSC/PAL)
	USB 2.0	Three
	Docking Connector	One
	Travel Battery Connector	One
	LED Status Indicators	Eleven

Audio	PremierSound audio/speaker subsystem ADI1981HD High Definition CODEC Integrated 16-bit Sound Blaster Pro compatible audio 24-bit DAC Integrated stereo speakers Integrated microphone External volume up, volume down, and mute buttons Stereo headphone/line out Stereo microphone in

Software	Preloaded Software Microsoft Windows XP	Adobe Acrobat Reader* HP Backup and Recovery Manager HP Help and Support Centre* HP Mobile Print Driver* HP ProtectTools Security Manager*: BIOS Configuration for HP ProtectTools Embedded Security for HP ProtectTools Credential Manager for HP ProtectTools HP Quick Launch Buttons HP Wireless Assistant HP OpenView Radia Management Solutions* Sonic Digital Media Plus*: RecordNow! (for optional DVD+/-RW and DVD/CDRW drives) MyDVD (DVD Authoring for optional DVD+/-RW drives) Synaptics Touchpad Driver Symantec Norton Internet Security* with complimentary 60-day live update Intervideo WinDVD* – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)

*NOTE: Software marked with an asterisk is loaded on the hard drive and can be installed by running the Software Setup utility.

Standard Features

Additional software available from the Web	HP Client Manager Software Smart Card Security for HP ProtectTools Device Access Manager for HP ProtectTools
HP Backup and Recovery Manager	Each unit is shipped with HP Backup and Recovery Manager. HP Backup and Recovery Manager can provide data and system file protection for HP business PCs to enable fast recovery if the system becomes corrupted or if important information is accidentally deleted. HP Backup and Recovery Manager can perform scheduled or manual backups of the entire drive or individual files and folders. Up to 8 GB of the hard drive is reserved for the system recovery software. HP Backup and Recovery Manager can also create software recovery CDs or DVDs (requires optional hardware).
HP OpenView Radia Management Solutions	HP OpenView Radia Management Solutions automate the management of software such as operating systems, software, software updates, content, and configuration settings to ensure that each computer is maintained in the correct configuration.
HP Client Management Interface	HP Client Management Interface is based on industry standards that include Microsoft Windows Management Interface (MS WMI), Web Based Enterprise Management (WBEM), System Management BIOS (SMBIOS), and Advanced Configuration and Power Interface (ACPI). HP CMI is a foundation technology utilized in HP Client Management Solutions.
SMBIOS Version 2.4	System Management BIOS, previously known as DMI BIOS, is used to store system management information.
HP ProtectTools Security Manager	HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are: - Smart Card Security for HP ProtectTools - BIOS Configuration for HP ProtectTools - Credential Manager for HP ProtectTools - Embedded Security for HP ProtectTools - Device Access Manager for HP ProtectTools

Standard Features

Security	Standard Features	HP ProtectTools Security Manager HP Biometric Fingerprint Sensor Integrated Smart Card Reader TPM 1.2 Embedded Security Chip* Configuration Control Hardware Memory Change Alert Ownership Tag Setup Password Power-On Password DriveLock TPM Enhanced DriveLock* HP Disk Sanitizer Kensington Lock Slot Support for Computrace / LoJack for Laptops (must be purchased separately)	
	Optional Features	HP Privacy Filter	Narrows viewing area so that screen data is visible only to persons directly in front of the monitor

*NOTE: TPM module disabled where use is restricted by law; for example, Russia.
For more information on HP security solutions refer to http://www.hp.com/go/security.

Power Supply	External Smart AC Adapter (65-watt standard with integrated graphics; 90-watt standard with discrete graphics), 6-foot (1.8-metre) power cord included. Total length including External AC adapter is 12 feet (3.66 metre). HP Fast Charge Technology*	

*Fast Charge Technology recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 12-cell Ultra Capacity batteries.

Battery	Primary Battery	55Wh 6-cell Lithium-Ion
	Optional HP 8-Cell Extended Life Battery	52Wh 8-cell high capacity Lithium-Ion
	Optional HP 12-Cell Ultra-Capacity Battery	95Wh 12-cell high capacity Lithium-Ion

Standard Features

Battery Life

	6-cell Primary with integrated graphics	6-cell Primary with discrete graphics
Primary Battery	Up to 6 hours	Up to 4 hours and 30 minutes
Primary Battery and optional HP 8-Cell Extended Life Battery	Up to 12 hours and 15 minutes	Up to 8 hours and 30 minutes
Primary Battery and optional HP 12-Cell Ultra-Capacity Battery	Up to 16 hours and 15 minutes	Up to 13 hours

NOTE: Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time Up to 1 week

Power Conservation

Supports enhanced Intel SpeedStep technology with Intel Core Duo and Intel Core Solo processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

Intel Display Power Saving technology (models with integrated graphics)
ATI PowerPlay technology (models with discrete graphics)

Hibernation

Standby

ACPI compliance

Docking

HP Docking Station
HP Advanced Docking Station
HP External MultiBay II
HP Adjustable Notebook Stand

HP's shared docking solutions provide simple and convenient port replication and cable management. Features include Gigabit NIC pass through, modem pass through, legacy parallel and serial ports, S-video TV out, USB 2.0 ports, integrated security mechanism*, integrated MultiBay II and ExpressCard** slots. These docking solutions are compatible across multiple Business Notebook platforms enabling a lower total cost of ownership.

* HP/Kensington Cable Lock required (purchased separately)
** HP Advanced Docking Station only

Service and Support

HP Services includes a three-year standard parts and labour warranty, pick-up or carry-in, and toll-free 7 x 24 hardware technical phone support. On-site service and warranty upgrades are also available.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Centre for details. http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp.

Smart Buy Promotion Models***

Standard Features

Smart Buy Promotion Model***

nc6400 EN176UT#ABA (English) EN176UT#ABC (Fr CAN)	**Processor**	Intel Core Duo Processor T2300E*
	Operating System	Genuine Windows XP Professional
	System Memory	512 MB 533-MHz DDR2 (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
*** Specially priced product, certain restrictions apply.

Smart Buy Promotion Model***

nc6400 RA260AT#ABA (English) RA260AT#ABC (Fr CAN)	**Processor**	Intel Core Duo Processor T2400*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 533-MHz DDR2 (2 DIMM)
	Hard Drive	80-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD+RW DL MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion

Standard Features

Power	External 65W adapter
Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.
*** Specially priced product, certain restrictions apply.

Smart Buy Promotion Model***

nc6400
RA263AT#ABA (English)
RA263AT#ABC (Fr CAN)

Processor	Intel Core Duo Processor T2400*
Operating System	Genuine Windows XP Professional
System Memory	1024 MB 533-MHz DDR2 (1 DIMM)
Hard Drive	60-GB 5400 rpm SATA
Display	14.1-inch WXGA
Graphics	ATI Mobility Radeon 256MB HyperMemory**
Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90W adapter
Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.
*** Specially priced product, certain restrictions apply.

Standard Features

Smart Buy Promotion Model***

nc6400 RA265AT#ABA (English) RA265AT#ABC (Fr CAN)	**Processor**	Intel Core Duo Processor T2500*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 533-MHz DDR2 (1 DIMM)
	Hard Drive	80-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 256MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD+RW DL MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.
*** Specially priced product, certain restrictions apply.

Smart Buy Promotion Model***

nc6400 EN362UT#ABA (English) EN362UT#ABC (Fr CAN)	**Processor**	Intel Core 2 Duo Processor T5500*
	Operating System	Genuine Windows XP Professional
	System Memory	512 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive

Standard Features

Battery	6-cell (55 WHr) Lithium-Ion
Power	External 65W adapter
Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
*** Specially priced product, certain restrictions apply.

Smart Buy Promotion Model***

nc6400 RB516AT#ABA (English) RB516AT#ABC (Fr CAN)	
Processor	Intel Core 2 Duo Processor T5600*
Operating System	Genuine Windows XP Professional
System Memory	1024 MB 667-MHz DDR2 (2 DIMM)
Hard Drive	80-GB 5400 rpm SATA
Display	14.1-inch WXGA
Graphics	Intel Graphics Media Accelerator 950
Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
MultiBay II Drive	DVD+RW DL MultiBay II Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 65W adapter
Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
*** Specially priced product, certain restrictions apply.

Standard Features

Smart Buy Promotion Model***

nc6400 RB517UT#ABA (English) RB517UT#ABC (Fr CAN)	Processor	Intel Core 2 Duo Processor T5600*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 512MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 512MB HyperMemory is a total of 64MB dedicated video memory and 448MB shared system memory.
*** Specially priced product, certain restrictions apply.

Smart Buy Promotion Model***

nc6400 RB518UT#ABA (English) RB518UT#ABC (Fr CAN)	Processor	Intel Core 2 Duo Processor T7200*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	80-GB 7200 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 512MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD+RW DL MultiBay II Drive

Standard Features

Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90W adapter
Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 512MB HyperMemory is a total of 64MB dedicated video memory and 448MB shared system memory.
*** Specially priced product, certain restrictions apply.

Standard Models

nc6400
EN177UA#ABA (English)
EN177UA#ABC (Fr CAN)

Processor	Intel Core Duo Processor T2300E*
Operating System	Genuine Windows XP Professional
System Memory	1024 MB 533-MHz DDR2 (2 DIMM)
Hard Drive	60-GB 5400 rpm SATA
Display	14.1-inch WXGA
Graphics	Intel Graphics Media Accelerator 950
Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90W adapter
Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.

Standard Features

nc6400 RC454AW#ABA (English) RC454AW#ABC (Fr CAN)	**Processor**	Intel Core Duo Processor T2400*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection Bluetooth 2.0
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.

---

nc6400 RA252AW#ABA (English) RA252AW#ABC (Fr CAN)	**Processor**	Intel Core Duo Processor T2400*
	Operating System	Genuine Windows XP Professional
	System Memory	512 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection Bluetooth 2.0
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion

Standard Features

	Power	External 65W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.

---

nc6400 RA253AW#ABA (English) RA253AW#ABC (Fr CAN)	Processor	Intel Core Duo Processor T2500*
	Operating System	Genuine Windows XP Professional
	System Memory	512 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 256MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection Bluetooth 2.0
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.

Standard Features

nc6400 RA266AA#ABA (English) RA266AA#ABC (Fr CAN)	**Processor**	Intel Core Duo Processor T2500*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 533-MHz DDR2 (1 DIMM)
	Hard Drive	80-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 256MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD+RW DL MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 256MB HyperMemory is a total of 64MB dedicated video memory and 192MB shared system memory.

nc6400 RB515UA#ABA (English) RB515UA#ABC (Fr CAN)	**Processor**	Intel Core 2 Duo Processor T5600*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (2 DIMM)
	Hard Drive	80-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	3/3/0

Standard Features

* Intel's numbering system is not a measurement of higher performance.

nc6400 RB519UA#ABA (English) RB519UA#ABC (Fr CAN)	Processor	Intel Core 2 Duo Processor T7200*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	80-GB 7200 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 512MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection, Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD+RW DL MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 512MB HyperMemory is a total of 128MB dedicated video memory and 384MB shared system memory.

nc6400 RM100AW#ABA (English) RM100AW#ABC (Fr CAN) Global	Processor	Intel Core 2 Duo Processor T5600*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	80-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	Intel Graphics Media Accelerator 950
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection Bluetooth 2.0
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)

Standard Features

	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 65W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.

---

nc6400 RM106AW#ABA (English) RM106AW#ABC (Fr CAN) Global	Processor	Intel Core 2 Duo Processor T7200*
	Operating System	Genuine Windows XP Professional
	System Memory	1024 MB 667-MHz DDR2 (1 DIMM)
	Hard Drive	80-GB 5400 rpm SATA
	Display	14.1-inch WXGA
	Graphics	ATI Mobility Radeon 512MB HyperMemory**
	Audio	ADI High Definition CODEC line out/headphone and microphone jacks integrated microphone
	Communications	56K V.92 modem Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection Bluetooth 2.0
	Integrated Security	TPM 1.2 Embedded Security Chip HP Biometric Fingerprint Sensor Smart Card Reader
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	MultiBay II Drive	DVD/CD-RW Combo MultiBay II Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90W adapter
	Warranty	3/3/0

* Intel's numbering system is not a measurement of higher performance.
** 512MB HyperMemory is a total of 64MB dedicated video memory and 448MB shared system memory.

Options

Memory	512-MB 533-MHz DDR2 SDRAM	PE831A
	1024-MB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM	EM993AA
	1024-MB 667-MHz DDR2 SDRAM	EM994AA
	2048-MB 667-MHz DDR2 SDRAM	EM995AA
MultiBay II Storage (9.5-mm)	DVD-ROM MultiBay II Drive	PA849A
	Combo DVD/CD-RW MultiBay II Drive	PA850A
	DVD+/-RW SuperMulti with Double Layer MultiBay II Drive	PA851A
	80-GB 5400 rpm MultiBay II Hard Drive	PH357A
Other Storage	80-GB 5400 rpm Primary SATA Hard Drive	ET354AA
	HP USB Digital Drive + 256-MB Secure Digital Card	DL702AA
	HP USB Diskette Drive	DC361B
Communications	Intel PRO/Wireless 3945ABG 802.11 a/b/g WLAN option kit	EX150AA#ABA
Expansion Solutions	HP Docking Station	EN488AA#ABA
	HP Advanced Docking Station	EN489AA#ABA
	HP 3-in-1 NAS Docking Station	EM537AA#ABA
	HP Monitor Stand	PA507A
	HP Adjustable Notebook Stand	PA508A
	HP External MultiBay II (9.5-mm)	PA509A#ABA
	HP 4-port USB 2.0 Hub	DG954A
Power	HP 2-bay Battery Charging Station	DT533A#ABA
	HP 10-bay Battery Charging Station	DT534A#ABA
	Battery Adapter kit #1	PK402A
	65W Smart AC Adapter	ED494AA#ABA
	90W Smart AC Adapter	ED495AA#ABA
	90W Smart Auto Adapter	ED493AA
	65W Air/Auto/AC Combo Adapter	ED993AA#ABA
	Primary 6-cell Battery Pack	PB994A
	HP 8-cell Extended Life Battery	PB993A
	HP 12-cell Ultra-Capacity Battery	EJ092AA

Options

Carrying Cases	HP Entry Value Case	DL617A
	HP Top Load Nylon	DC915A
	HP Executive Leather case	PA847A
	HP Sport Backpack	DG102A
Security	HP PCMCIA Smart Card Reader	DC350B
	HP/Kensington Cable Lock	PC766A
	Privacy Film for 6400 Series	ES216AA
Input/Output Devices	USB/PS2 Keyboard	DC852A#ABA
	USB/PS2 Keyboard (French)	DC852A#ABC
	USB/PS2 Optical Mouse	DC369A
	HP USB Optical Travel Mouse	F2100A

Memory

Support for up to 4096 MB* of 533- or 667-MHz DDR2 SDRAM
Two DIMM slots
DIMM sizes supported: 512 MB, 1024 MB, and 2048 MB

Standard Memory

- 512 MB (512 MB x 1 or 256 MB x 2)
- 1024 MB (1024 MB x 1 or 512 MB x 2)
- 2048 MB (1024 MB x 2)

Optional Memory Upgrades

Support for up to 4096 MB* of memory is available (with the installation of optional DDR2 SDRAM memory kits). Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
1024 MB	512 MB	512 MB
1280 MB	1024 MB	256 MB
1536 MB	1024 MB	512 MB
2048 MB	1024 MB	1024 MB
4096 MB*	2048 MB	2048 MB

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Memory Upgrades

512-MB 533-MHz DDR2 SDRAM	PE831A
1024-MB 533-MHz DDR2 SDRAM	PE832A
512-MB 667-MHz DDR2 SDRAM	EM993AA
1024-MB 667-MHz DDR2 SDRAM	EM994AA
2048-MB 667-MHz DDR2 SDRAM	EM995AA

* Above 3-GB, all memory may not be available due to system resource requirements.

Removable Media Drive Support

	Quantity Supported	Drive Bay
DVD+/-RW SuperMulti MultiBay II Drive with Double Layer*	One	MultiBay II
DVD/CD-RW Combo MultiBay II Drive*	One	MultiBay II
DVD-ROM MultiBay II Drive*	One	MultiBay II

Hard Drive Support

	Quantity Supported	Drive Bay
Primary Hard Drives		
100-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
60-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
100-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 5400 rpm SMART SATA Hard Drive	Up to two	Dedicated hard drive bay and/or MultiBay II
60-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay

* MultiBay II drives supported in the internal MultiBay II are also supported in the optional HP External MultiBay II and the HP Advanced Docking Station.

System Unit	**Dimensions** (HxWxD)	1.1 (at front) x 13.0 x 9.4 in (29.2 (at front) x 330 x 239 mm)	
	Weight	with MultiBay II weight saver and 6-cell battery	4.6 lb (2.1 kg)
		with MultiBay II DVD/CDRW Combo Drive and 6-cell battery	5.0 lb (2.27 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight includes integrated graphics, battery, 60-GB hard drive, 512-MB memory, 802.11 wireless communications module, and TPM Embedded Security Chip. Weight varies by configuration and components.		
	Stand-Alone Power Requirements	Normal Operating Voltage	18.5 V
		Average Operating Power	22 W (models with integrated graphics) 29 W (models with discrete graphics)
		Max Operating Power	< 65 W (models with integrated graphics) < 90 W (models with discrete graphics)
	Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Relative Humidity	Operating	10% to 90%, non-condensing
		Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	Shock	Operating	125 G, 2 ms, half-sine
		Non-operating	200 G, 2 ms, half-sine
	Random Vibration	Operating	0.75 grms
		Non-operating	1.50 grms
	Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
		Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
	Industry Standard Certifications	UL	Yes
		CSA	Yes
		FCC Compliance	Yes
		Energy Star Compliant	Yes
		ICES	Yes
		GS	Yes
		Australia / NZ A-Tick Compliance	Yes
		CCC	Yes
		Japan VCCI Compliance	Yes
		MIC	Yes
		BSMI	Yes
		CE Marking Compliance	Yes
		BNCI or BELUS	Yes
		CIT	Yes
		GOST	Yes

		Saudi Arabian Compliance (ICCP)	Yes
		SABS	Yes
		UKRSERTCOMPUTER	Yes
HP 90W Smart AC Adapter (models with discrete graphics)	**Dimensions**	5.24 x 2.28 x 1.1 in (13.3 x 5.8 x 2.9 cm)	
	Weight	0.86 lb (390 g)	
	Input	100 to 240 VAC	
		Input Efficiency	83% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version
			2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
	Output	Output power 65W	90W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC950, EN60950, UL1950, Class2, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCIB, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.	
	Option Kit Contents	90W AC Adapter, power cable, warranty booklet	

Technical Specifications

HP 65W Smart AC Adapter (models with integrated graphics)	**Dimensions**	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	Weight	0.62 lb (280 g)	
	Input	100 to 240 VAC	
		Input Efficiency	83% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
	Output	Output power 65W	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.	
	Option Kit Contents	65W AC Adapter, power cable, warranty booklet	
Optional HP 12-Cell Ultra-Capacity Battery	**Dimensions** (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	Weight	1.77 lb (0.803 kg)	
	Cells/Type	12-cell Lithium-Ion	
	Energy	Voltage	14.8V
		Watt-hour Capacity	95Wh
		Amp-hour Capacity	6.45Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	Smart Adapter	3 to 4 hours
		System ON	4 to 5 hours (depending on system power consumption)
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

Technical Specifications

Optional HP 8-Cell Extended Life Battery	Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)	
	Weight	1.00 lb (0.455 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	52Wh
		Amp-hour Capacity	3.6Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	
55Wh Primary 6-Cell Battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	Weight	0.737 lb (0.335 kg)	
	Cells/Type	6-cell Lithium-Ion	
	Energy	Voltage	10.8V
		Watt-hour Capacity	55Wh
		Amp-hour Capacity	5.1Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

Technical Specifications

14.1-Inch Colour TFT WXGA Display	Active Area (W x H)	11.9 x 7.5 in (30.3 x 19.0 cm)	
	Diagonal Size	14.1 in (35.7 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.237 mm
		Format	1280x800
		Configuration	RGB Stripe
	Backlight	CCFL	
	PPI	107	
	Viewing Angle	±45° Horizontal, ±25° Vertical (typical)	

14.1-Inch Colour TFT WXGA+ Display	Active Area (W x H)	11.9 x 7.5 in (30.3 x 19.0 cm)	
	Diagonal Size	14.1 in (35.7 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.210 mm
		Format	1440 x 900
		Configuration	RGB Stripe
	Backlight	CCFL	
	PPI	121	
	Viewing Angle	±45° Horizontal, ±25° Vertical (typical)	

Hard Drives

Technical Specifications

100-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	
80-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	
60-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	60 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	117,231,408	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

100-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	
80-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	
60-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	60 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	117,231,408	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Removable Storage Drives – MultiBay II

DVD-ROM MultiBay II Drive	**Dimensions**	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)	
	Weight	0.45 lb (205 g)	
	Access Times	Random	<120 ms CD
			<200 ms DVD
	Max Data Transfer Rate	24X-CD-ROM	3,600 KB/s
		8X-DVD	10,800 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
	Transport	Tray Loading	
DVD/CD-RW Combo MultiBay II Drive	**Dimensions**	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)	
	Weight	0.45 lb (205 g)	
	Access Times	Random	<120 ms CD
			<155 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		24X CD-RW	3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	700 MB	
	Transport	Tray loading	

DVD+/-RW SuperMulti MultiBay II Drive with Double Layer	Dimensions	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)	
	Weight	0.45 lb (205 g)	
	Access Times	Random	<150 ms CD
			<125 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		10X CD-RW	1,500 KB/s
		4X DVD+R	5,400 KB/s
		2.4X DVD+RW	3,240 KB/s
		4X DVD-R	5,400 KB/s
		2X DVD-RW	2,700 KB/s
		2X DVD-RAM	2,700 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

80-GB 5400 rpm MultiBay II Hard Drive	MultiBay II Drive Adapter	Dimensions (H x W x D)	0.37 x 5.51 x 5.04 in (0.95 x 14.0 x 12.8 cm)
		Weight	0.16 lb (72 g)
	Drive Weight	0.22 lb (101 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-6	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 131° F (5° to 55° C)	
	Features	ATA Security	

Technical Specifications

HP Biometric Fingerprint Sensor	Mobile Voltage Operation	3.0V–3.6V Single Supply
	Operating Temperature	32° – 158°F (0° – 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images
PremierSound Audio		
Hardware	Implementation	ADI1981HD High Definition CODEC
	Volume Controls	Up, down, and mute buttons
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone Jack	Stereo or mono
	Headphone/Line Out Jack	Stereo
	Integrated Microphone	Yes
Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit
Internal Speakers	Power Rating	2 Watts
	Impedance	4 Ohms
Communications		

Technical Specifications

Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (BCM5753M)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Power Management	ACPI compliant -- multiple power modes Situation-sensitive features reduce power consumption NIC Battery Saving Mode (enabled by default)
	Performance Features	TCP/IP/UDP Checksum Offload (configurable) TCP Segmentation Offload CPU Task Offload Adaptive Interrupts
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Cable Analyzer
	Interface	PCI Express x1
	NIC Device Driver Name	Broadcom NetXtreme Gigabit Ethernet
	Drivers Available	Microsoft Windows XP Microsoft Windows 2000

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/ Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries

	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
	Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251
Broadcom 4311BG 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM

Security[1]	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CKK)[2]	17.5 dBm	
Output Power (for OFDM; power varies by data rate)[2]	15 dBm	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode[3]: 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity[4]	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating Non-operating	32° to 176° F (0° to 80° C) -40° to 176° F (-40° to 80° C)
Humidity	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)
Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)

	Configuration Utility[5]	Choice of Configuration Utility: • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)
	LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.

Broadcom 4311AG 802.11a/b/g WiFi Adapter	**Wireless LAN Standards**	IEEE 802.11a IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security[1]	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CKK)[2]	17.5 dBm
	Output Power (for OFDM; power varies by data rate)[2]	15 dBm
	Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode[3]: 390 mW (nominal) Sleep mode: 20 mW (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity[4]	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm

Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating Non-operating	32° to 176° F (0° to 80° C) -40° to 176° F (-40° to 80° C)
Humidity	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)
Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
Configuration Utility[5]	Choice of Configuration Utility: • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.

Intel PRO/Wireless 3945ABG 802.11a/b/g Network Connection

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM

Security[1]	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CKK)[2]	15 dBm	
Output Power (for OFDM; power varies by data rate)[2]	15 dBm	
Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode[3]: 150 mW (nominal) Sleep mode: 30 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity[4]	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating Non-operating	32° to 176° F (0° to 80° C) -40° to 176° F (-40° to 80° C)
Humidity	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)
Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)

	Configuration Utility[5]	Choice of Configuration Utility: • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet (required for Cisco Compatible Extensions support)
	LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.

HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification	2.0 Compliant
	Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBM at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
	Antenna	Internally integrated within module
	Range	Up 33 ft (10 m)
	Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
	OS Support	Microsoft Windows XP Professional and Home Microsoft Windows 2000
	Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark

Temperature	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90%
	Non-operating	5% to 95%
Altitude	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software)	
	Serial Port Profile (SPP)*	
	Dial-Up Networking (DUN)*	
	Generic Object Exchange Profile (GOEP)	
	Object Push Profile (OPP)*	
	File Transfer Profile (FTP)	
	Synchronization Profile (SYNC)	
	Hard Copy Cable Replacement (HCRP)*	
	Personal Area Networking Profile (PAN)*	
	Human Interface Device Profile (HID)*	
	FAX Profile (FAX)	
	Basic Imaging Profile (BIP)	
	Headset Profile (HSP)	
	Hands Free Profile (HFP)	
	Advanced Audio Distribution Profile (A2DP)	

* indicates the profile is also supported by Microsoft Windows XP SP2

Environmental Data	**Eco-Label Certifications**	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: • US Energy Star • US Federal Energy Management Program (FEMP) • Taiwan Green Mark • China Energy Conservation Program • IT ECO declaration
	System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook."

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	25.6 W	25.6 W	25.6 W
Sleep (Energy Star low power mode)	2.1 W	2.6 W	2.1 W
Off	2.0 W	2.4 W	2.0 W
Heat Dissipation*	**115 VAC**	**230 VAC**	**100 VAC**
Normal Operation	87.3 BTU/hr	87.3 BTU/hr	87.3 BTU/hr
Sleep	7.2 BTU/hr	8.9 BTU/hr	7.2 BTU/hr
Off	6.8 BTU/hr	7.2 BTU/hr	6.8 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.40	25.1
Fixed Disk (random writes)	3.43	34.1

Batteries

This product complies with ISO standards:

EU Directive 91/ 157/ EEC
EU Directive 93/ 86/ EEC
EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

Mercury greater than 5ppm by weight
Cadmium greater than 10ppm by weight
Lead greater than 4000 ppm by weight.

Battery type and chemistry used in the product:

Primary battery
6-cell high capacity Lithium-Ion battery pack

Real Time Clock battery
CR2032L/DBE (coin cell), Lithium

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 0.055 pounds (25 grams) used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 94% recycle-able when properly disposed of at end of life.

Packaging

Packaging Materials

- External:
  - Corrugated Paper – 0.89 lb (402 g)
- Internal:
  - Corrugated – 0.10 lb (46 g)
  - PET Bag– 0.03 lb (15 g)
- The plastic packaging material is made from at least 20% post-consumer recycled content.
- The corrugated paper packaging materials contains at least 80% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment (http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling

HP offers our customers several other options for handling their aging computers while also minimizing the impact on the environment-including product trade-in and leasing services-in addition to recycling services. Please go to: http://www.hp.com/recycle, or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report
http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html
Environment website
http://www.hp.com/environment
Eco-label certifications
http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html
ISO 14001 certificates:
http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html

Copyright © 2006 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core Duo, Centrino, and SpeedStep are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.